



EXTERNAL I/O	
WIRE COLOUR	FUNKTION
GY-BN	GND
BK	INPUT 1
VT	INPUT 2
GY-PK	INPUT 3
RD-BU	INPUT 4
WH-GN	INPUT 5
BN-GN	INPUT 6
WH-BU	ANALOG INPUT
WH-YE	OUTPUT 1
YE-BN	OUTPUT 2
WH-GY	OUTPUT 3
RD	GND

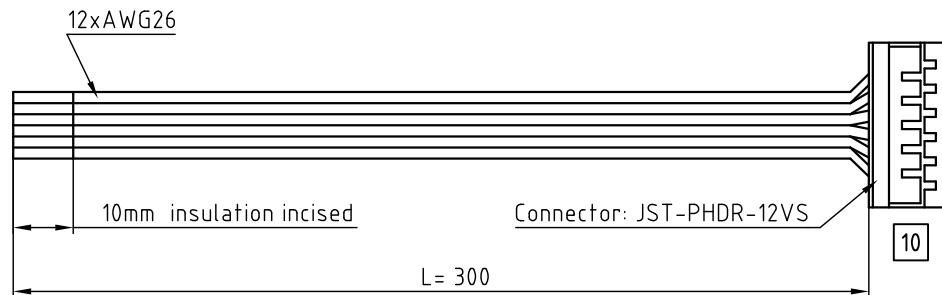


JST PHDR-12VS	
PIN No.	WIRE COLOUR
1	GY-BN
2	BK
3	VT
4	GY-PK
5	RD-BU
6	WH-GN
7	BN-GN
8	WH-BU
9	WH-YE
10	YE-BN
11	WH-GY
12	RD

Position	Application 1	Application 2	Lot
10	JST PHDR-12VS	12 pole	1
20	JST PHDR-8VS	8 pole	1

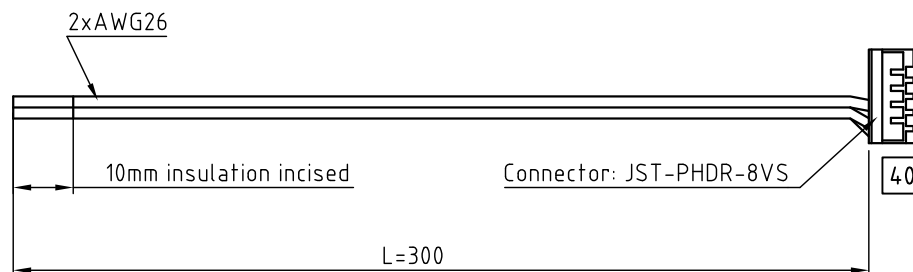

JST PHDR-8VS		
PIN No.	WIRE COLOUR	ASSIGNMENT
1		
2		
3		
4		
5		
6		
7	BN	GND
8	WH	+ Ub

				 Nanotec PLUG & DRIVE	SCALE FREE	APVD	G.S.	24.03.11	CABLE SET SMCI12
					X ±0.5	CHKD			
					1PL ±0.2	DRN	J.W.	24.03.11	DWG.NO
REV	DESCRIPTION	DATE	APVD	ZK-SMCI12-IO	2PL ±0.1	SIGNATURE	DATE		ZK-SMCI12-IO
					ANGLE ±30'				